


The Pride of Top Quality
FOOT MASTER®

Heat-resistant casters



Guide for selection of wheels : Heat-resistant casters

Image	Series	Description	Wheel code	Wheel dia mm	Wheel width mm	Axle bore mm	Hub length mm	Load capacity Kg	Bearing type
	FRD	<ul style="list-style-type: none"> - Fluoro rubber (Shore A85) - Aluminum core - Two ball bearings 	FRD-75-30	75	30	8	30	60	608 ZZ
			FRD-100-30	100	30	8	30	80	608 ZZ
			FRD-125-30	125	30	8	30	100	608 ZZ

FOOT MASTER®

Heat-resistant casters


PL series



kg 60~100kg

RoHS



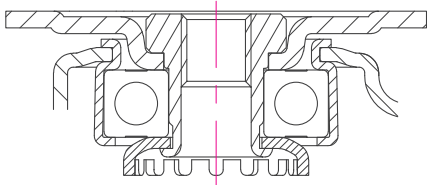





TEMP -10~250°C




Brackets: Pressed steel plate, precision ball bearing in the swivel head which is advantageous to smooth swiveling and excellent durability, strong integrated pressed steel frame, bolted wheel axle structure, heat-resistant special grease applied

Surface Treatment: Zinc plated

* Recommended Load = Load Cap. × 3

Swivel	Rigid	Wheel type	 mm	 mm	 Kg	 mm	 mm	 mm	 mm	 mm
PL-75-ASF	PL-75-ARF	FRD	75	30	60	112,5	40	95x64	78x45 72x45	9
PL-100-ASF	PL-100-ARF		100	30	80	137,5	40			
PL-125-ASF	PL-125-ARF		125	30	100	162,5	40			

Options

						
Code Suffix	FRD					
Description	Flu. Rubber(A85)					
Available for	75 ~ 125					

FOOT MASTER®


Heat-resistant casters

PL series

 **60~100kg**

RoHS









 **-10~250°C**




Brackets: Forged steel bolt, precision ball bearing in the swivel head which is advantageous to smooth swiveling and excellent durability, strong integrated pressed steel frame, bolted wheel axle structure, heat-resistant special grease applied

Surface Treatment: Zinc plated

* Recommended Load = Load Cap. × 3

Swivel	Wheel type	 mm	 mm	 Kg	 mm	 mm	 mm	 mm	 mm
PL-75-ASS	FRD	75	30	60	112,5	40	5/8"-11UNC M12x1.75P 1/2"-12UNC	10,5+25	22
PL-100-ASS		100	30	80	137,5	40			
PL-125-ASS		125	30	100	162,5	40			

Options

									
Code Suffix	FRD								
Description	Flu, Rubber(A85)								
Available for	75 ~ 125								



FOOT MASTER®

Heat-resistant casters GDS series

 60kg

 RoHS



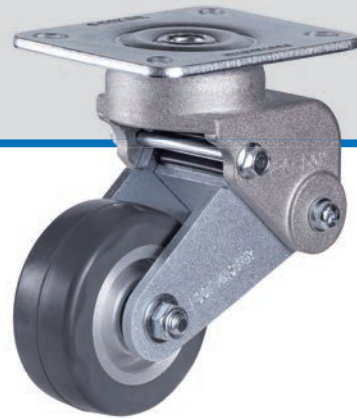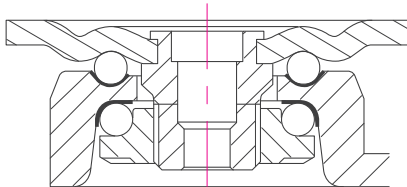





 -10~250°C




Brackets: Pressed steel plate, double ball bearing with hardened bearing seats in the swivel head, aluminum frame, minute shock absorption function with heat-resistant special rubber, special wheel axle for reinforce of smooth rolling, maximum up to 250°C

Surface Treatment: Nickel plating, Zinc plated

* Recommended Load = Load Cap. × 3

Swivel	Rigid	Wheel type	Cushion	 mm	 mm	 Kg	 mm	 mm	 mm	 mm	 mm
GDS-75-ASF	GDS-75-ARF	FRD	65 °	75	30	60	130-15	35~39	100x85	80x60 76x55	9

Options

											
Code Suffix	FRD										
Description	Flu. Rubber(A85)										
Available for	75										

